

CB4008 Junction Box


The CB4008 concrete floor junction boxes are the perfect solution for installation on “new work” and “old work” concrete floors applications that require a subtle junction box cover. Suitable for installation in concrete floors interior dry locations only .

The FBS junction boxes provide an excellent solution to join different runs or change the direction of the conduits or cables, and provide space for the connection and branching of the enclosed conductors.

CB4008 is supplied with three concentric knockouts per side and six at the bottom all for 1/2” and 3/4” conduits.

FBS Junction Boxes are designed for use with the PMC50 floor boxes.

The CB4008 junction boxes are suitable for use in concrete floors interior dry locations, where the accumulation of scrub water is unlikely to occur.

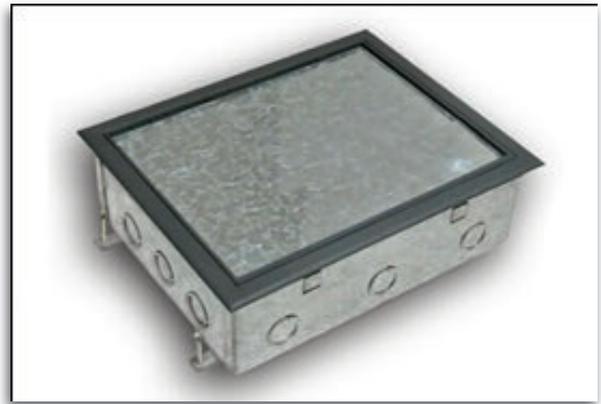

CB4008-B (Black Flange)

Features

- Depth cover adjustable up to 1" to accept floor covering.
- 12 (3 per side) Concentric knockouts + 6 at the bottom.
- Black, Grey or almond colors.
- Provides different conduits size feed (1/2", 3/4").
- Quick and easy installation.
- Box 16 Ga Galvanized steel.
- 11 GA steel blank cover.
- PMC50 coordinated flange.

Dimensions			
	Length	Width	Height
Steel Box	10 3/16" (259 mm)	8" (203 mm)	3 5/16" (84 mm)
Frame (OD)	11 1/8" (283 mm)	8 7/8" (225 mm)	1/8" (3 mm)

“Old Work” applications
 Leveling feet can be removed unscrewing 4 screws on the bottom of the box.

Replace X for color code: Black= B Gray=G Almond= A

